



Radio Frequency Emissions Compliance Report For AT&T Mobility

Site Name:	Freedom Boulevard	Site Structure Type:	Monopine
Address:	1478 Freedom Boulevard	Latitude:	36.929667
	Watsonville, CA	Longitude:	-121.766375
Report Date:	January 15, 2020	Project:	New Build

Compliance Statement

Based on information provided by AT&T Mobility and predictive modeling, the Freedom Boulevard installation proposed by AT&T Mobility will be compliant with Radiofrequency Radiation Exposure Limits of 47 C.F.R. §§ 1.1307(b)(3) and 1.1310. RF alerting signage and restricting access to the antenna to authorized personnel that have completed RF safety training is required for Occupational environment compliance. The proposed operation will not expose members of the General Public to hazardous levels of RF energy at ground level or in adjacent buildings.

Certification

I, David H. Kiser, am the reviewer and approver of this report and am fully aware of and familiar with the Rules and Regulations of both the Federal Communications Commissions (FCC) and the Occupational Safety and Health Administration (OSHA) with regard to Human Exposure to Radio Frequency Radiation, specifically in accordance with FCC's OET Bulletin 65. I have reviewed this Radio Frequency Exposure Assessment report and believe it to be both true and accurate to the best of my knowledge.



General Summary

The compliance framework is derived from the Federal Communications Commission (FCC) Rules and Regulations for preventing human exposure in excess of the applicable Maximum Permissible Exposure ("MPE") limits. At any location at this site, the power density resulting from each transmitter may be expressed as a percentage of the frequency-specific limits and added to determine if 100% of the exposure limit has been exceeded. The FCC Rules define two tiers of permissible exposure differentiated by the situation in which the exposure takes place and/or the status of the individuals who are subject to exposure. General Population / Uncontrolled exposure limits apply to those situations in which persons may not be aware of the presence of electromagnetic energy, where exposure is not employment-related, or where persons cannot exercise control over their exposure. Occupational / Controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment, have been made fully aware of the potential for exposure, and can exercise control over their exposure. Based on the criteria for these classifications, the FCC General Population limit is considered to be a level that is safe for continuous exposure time. The FCC General Population limit is 5 times more restrictive than the Occupational limits.

Table 1: FCC Limits

Frequency (MHz)	<i>Limits for General Population/ Uncontrolled Exposure</i>		<i>Limits for Occupational/ Controlled Exposure</i>	
	Power Density (mW/cm ²)	Averaging Time (minutes)	Power Density (mW/cm ²)	Averaging Time (minutes)
30-300	0.2	30	1	6
300-1500	f/1500	30	f/300	6
1500-100,000	1.0	30	5.0	6

f=Frequency (MHz)

In situations where the predicted MPE exceeds the General Population threshold in an accessible area as a result of emissions from multiple transmitters, FCC licensees that contribute greater than 5% of the aggregate MPE share responsibility for mitigation.

Based on the computational guidelines set forth in FCC OET Bulletin 65, Waterford Consultants, LLC has developed software to predict the overall Maximum Permissible Exposure possible at any location given the spatial orientation and operating parameters of multiple RF sources. The power density in the Far Field of an RF source is specified by OET-65 Equation 5 as follows:

$$S = \frac{EIRP}{4 \cdot \pi \cdot R^2} \text{ (mW/cm}^2\text{)}$$

where EIRP is the Effective Radiated Power relative to an isotropic antenna and R is the distance between the antenna and point of study. Additionally, consideration is given to the manufacturers' horizontal and vertical antenna patterns as well as radiation reflection. At any location, the predicted power density in the Far Field is the spatial average of points within a 0 to 6-foot vertical profile that a person would occupy. Near field power density is based on OET-65 Equation 20 stated as

$$S = \left(\frac{180}{\theta_{BW}} \right) \cdot \frac{100 \cdot P_{in}}{\pi \cdot R \cdot h} \text{ (mW/cm}^2\text{)}$$

where P_{in} is the power input to the antenna, θ_{BW} is the horizontal pattern beamwidth and h is the aperture length.

For any area in excess of 100% General Population MPE, access controls with appropriate RF alerting signage must be put in place and maintained to restrict access to authorized personnel. Signage must be posted to be visible upon approach from any direction to provide notification of potential conditions within these areas. Subject to other site security requirements, occupational personnel should be trained in RF safety and equipped with personal protective equipment (e.g. RF personal monitor) designed for safe work in the vicinity of RF emitters. Controls such as physical barriers to entry imposed by locked doors, hatches and ladders or other access control mechanisms may be supplemented by alarms that alert the individual and notify site management of a breach in access control. Waterford Consultants, LLC recommends that any work activity in these designated areas or in front of any transmitting antennas be coordinated with all wireless tenants.

Analysis

AT&T Mobility proposes the following installation at this location:

- INSTALL NEW ANTENNAS AND MISC EQUIPMENT ON NEW 75' TALL MONOPINE

The antenna will be mounted on a 75-foot Monopine with a centerline 67 feet above ground level. Proposed antenna operating parameters are listed in Appendix A. Other appurtenances such as GPS antennas, RRUs and hybrid cable below the antennas are not sources of RF emissions. No other antennas are known to be operating in the vicinity of this site.

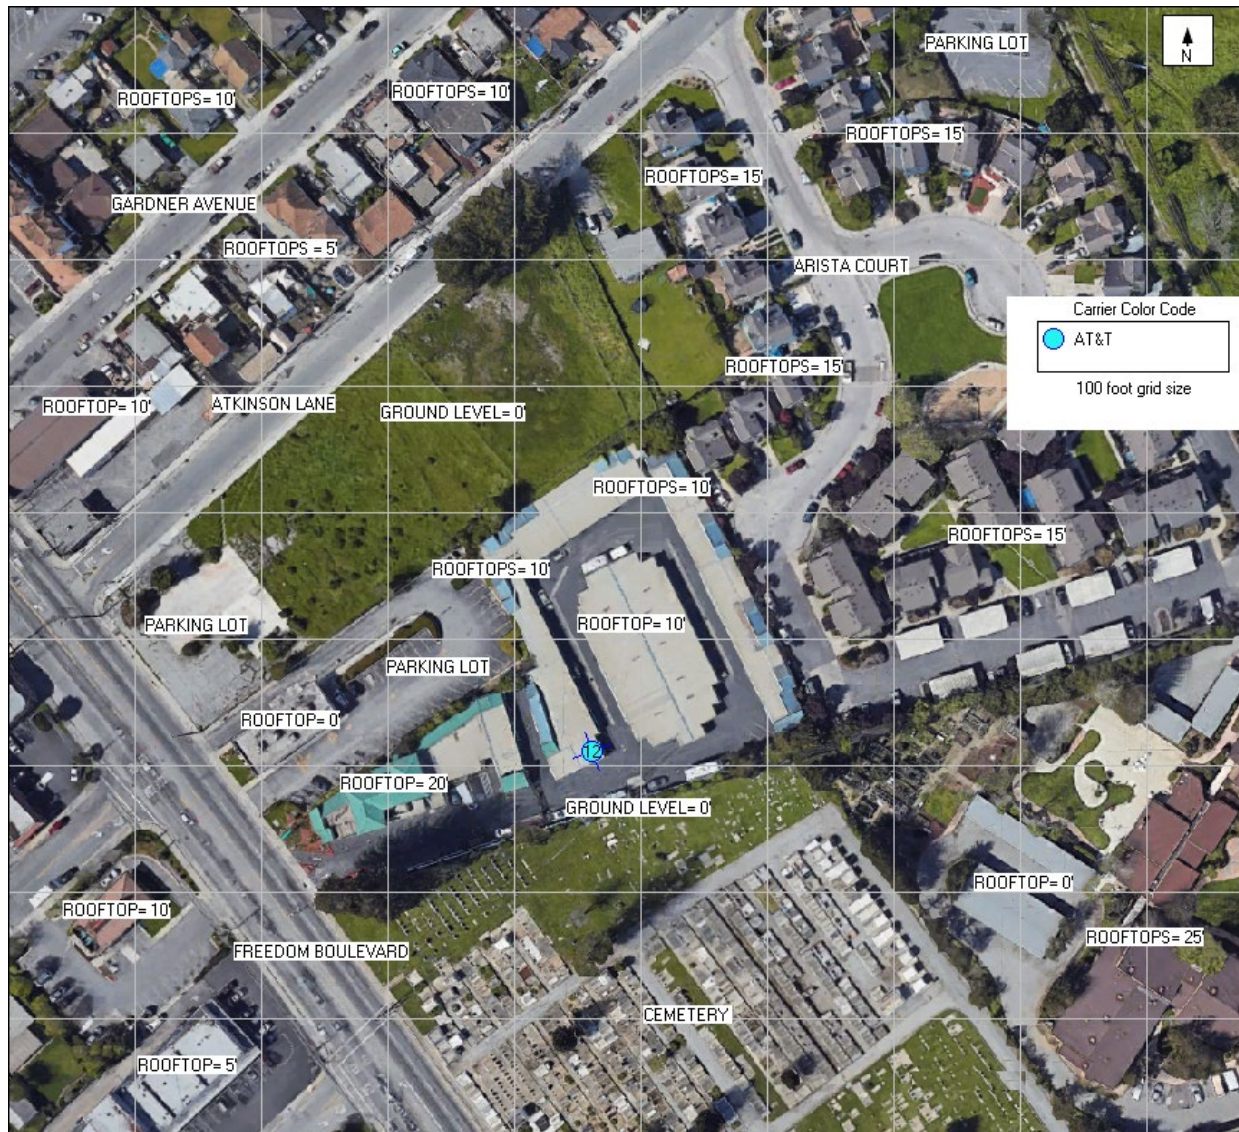


Figure 1: Antenna Locations

Power density decreases significantly with distance from any antenna. The panel-type antennas to be employed at this site are highly directional by design and the orientation in azimuth and mounting elevation, as documented, serves to reduce the potential to exceed MPE limits at any location other than directly in front of the antennas. For accessible areas at ground level, the maximum predicted power density level resulting from all AT&T Mobility operations is 8.5702% of the FCC General Population limits. Incident at adjacent

buildings depicted in Figure 1, the maximum predicted power density level resulting from all AT&T Mobility operations is 12.5926% of the FCC General Population limits. The proposed operation will not expose members of the General Public to hazardous levels of RF energy at ground level or in adjacent buildings.

Waterford Consultants, LLC recommends posting RF alerting signage with contact information (Caution 2B) at the base of the Monopine to inform authorized climbers of potential conditions near the antennas. These recommendations are depicted in Figure 2.



Figure 2: Mitigation Recommendations
Caution 2B posted at base of monopine



Caution 2B

Appendix A: Operating Parameters Considered in this Analysis

Antenna #:	Carrier:	Manufacturer	Pattern:	Band:	Mech Az (deg):	Mech DT (deg):	H BW (deg):	Length (ft):	TPO (W):	Channels:	Loss (dB):	Gain (dBd):	ERP (W):	EIRP (W):	Rad Center (ft):
1	AT&T	CCI	TPA45R-KU6A 02DT	700	340	0	51	6.0	40	4	0	11.05	2038	3343	67
1	AT&T	CCI	TPA45R-KU6A 02DT	850	340	0	48	6.0	40	4	0	12.15	2625	4306	67
1	AT&T	CCI	TPA45R-KU6A 03DT	1900	340	0	45	6.0	40	4	0	13.85	3883	6370	67
1	AT&T	CCI	TPA45R-KU6A 03DT	2100	340	0	39	6.0	40	4	0	15.05	5118	8397	67
2	AT&T	CCI	TPA45R-KU6A 02DT	700	340	0	51	6.0	40	4	0	11.05	2038	3343	67
2	AT&T	CCI	TPA45R-KU6A 03DT	1900	340	0	45	6.0	40	4	0	13.85	3883	6370	67
3	AT&T	CCI	TPA45R-KU6A 02DT	700	340	0	51	6.0	40	2	0	11.05	1019	1671	67
3	AT&T	CCI	TPA45R-KU6A 03DT	2300	340	0	45	6.0	25	4	0	14.15	2600	4266	67
4	AT&T	CCI	TPA45R-KU6A 02DT	700	250	0	51	6.0	40	4	0	11.05	2038	3343	67
4	AT&T	CCI	TPA45R-KU6A 02DT	850	250	0	48	6.0	40	4	0	12.15	2625	4306	67
4	AT&T	CCI	TPA45R-KU6A 03DT	1900	250	0	45	6.0	40	4	0	13.85	3883	6370	67
4	AT&T	CCI	TPA45R-KU6A 03DT	2100	250	0	39	6.0	40	4	0	15.05	5118	8397	67
5	AT&T	CCI	TPA45R-KU6A 02DT	700	250	0	51	6.0	40	4	0	11.05	2038	3343	67
5	AT&T	CCI	TPA45R-KU6A 03DT	1900	250	0	45	6.0	40	4	0	13.85	3883	6370	67
6	AT&T	CCI	TPA45R-KU6A 02DT	700	250	0	51	6.0	40	2	0	11.05	1019	1671	67
6	AT&T	CCI	TPA45R-KU6A 03DT	2300	250	0	45	6.0	25	4	0	14.15	2600	4266	67
7	AT&T	CCI	TPA45R-KU6A 02DT	700	160	0	51	6.0	40	4	0	11.05	2038	3343	67
7	AT&T	CCI	TPA45R-KU6A 02DT	850	160	0	48	6.0	40	4	0	12.15	2625	4306	67
7	AT&T	CCI	TPA45R-KU6A 03DT	1900	160	0	45	6.0	40	4	0	13.85	3883	6370	67
7	AT&T	CCI	TPA45R-KU6A 03DT	2100	160	0	39	6.0	40	4	0	15.05	5118	8397	67
8	AT&T	CCI	TPA45R-KU6A 02DT	700	160	0	51	6.0	40	4	0	11.05	2038	3343	67
8	AT&T	CCI	TPA45R-KU6A 03DT	1900	160	0	45	6.0	40	4	0	13.85	3883	6370	67
9	AT&T	CCI	TPA45R-KU6A 02DT	700	160	0	51	6.0	40	2	0	11.05	1019	1671	67
9	AT&T	CCI	TPA45R-KU6A 03DT	2300	160	0	45	6.0	25	4	0	14.15	2600	4266	67
10	AT&T	CCI	TPA45R-KU6A 02DT	700	70	0	51	6.0	40	4	0	11.05	2038	3343	67
10	AT&T	CCI	TPA45R-KU6A 02DT	850	70	0	48	6.0	40	4	0	12.15	2625	4306	67

Freedom Boulevard - New Build 01152020

Antenna #:	Carrier:	Manufacturer	Pattern:	Band:	Mech Az (deg):	Mech DT (deg):	H BW (deg):	Length (ft):	TPO (W):	Channels:	Loss (dB):	Gain (dBd):	ERP (W):	EIRP (W):	Rad Center (ft):
10	AT&T	CCI	TPA45R-KU6A 03DT	1900	70	0	45	6.0	40	4	0	13.85	3883	6370	67
10	AT&T	CCI	TPA45R-KU6A 03DT	2100	70	0	39	6.0	40	4	0	15.05	5118	8397	67
11	AT&T	CCI	TPA45R-KU6A 02DT	700	70	0	51	6.0	40	4	0	11.05	2038	3343	67
11	AT&T	CCI	TPA45R-KU6A 03DT	1900	70	0	45	6.0	40	4	0	13.85	3883	6370	67
12	AT&T	CCI	TPA45R-KU6A 02DT	700	70	0	51	6.0	40	2	0	11.05	1019	1671	67
12	AT&T	CCI	TPA45R-KU6A 03DT	2300	70	0	45	6.0	25	4	0	14.15	2600	4266	67